

# Phase-out inputs for SI236

Input Options for SI236.....	1
Option 4: Thermocouple Input.....	1
Option 5: RTD Input.....	1
Option 6: Frequency / Pulse Input.....	2
Frequency Input.....	2
DC Pulse Input.....	2
Option 7: Resistance 2-Wire.....	2
Option 8: AC Current / Voltage.....	2
AC Voltage.....	2
AC Current.....	2


## Option 4: Thermocouple Input

The SI236 can be equipped with a special thermocouple input circuit. Thermocouple types can be E, J, K, N, R, S and T. Automatic cold junction compensation is standard. On request the circuit can be configured for up-or-down scale burn-out.

- T/C input spans: 4mV up to 80mV
- Input impedance: > 1MΩ
- Calibration accuracy: <0.5% of range.
- Cold junction compensation error: 0.02% per °C C/J change, over ambient range of 0-60°C with input range 100°C

When ordering you must specify:

- T/C type: (E, J, K, N, R, S, or T)
- Cal: ? - ???°C

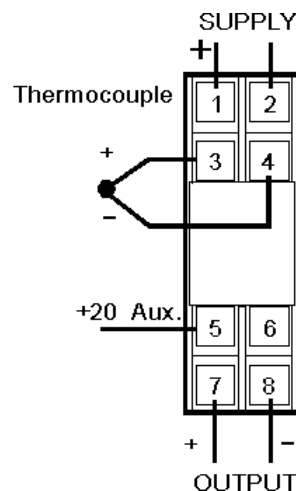


## Option 5: RTD Input

The standard RTD (resistance temperature detector), is Platinum 100 (100 Ω at 0°C), however any user specified type of RTD can be accommodated as long as there is no substantial non-linearity. The RTD is part of an input bridge circuit and should be wired in 3-wire fashion to avoid errors caused by lead resistance changes. 2-wire connection can be used where a short lead length under constant temperature condition will not generate a resistance change. Sensor excitation current is as low as 0.6mA preventing self-heating of the sensor. Lead breakage will cause the output to increase to maximum (30mA).

- Combined linearity and drift error: 0.5% of span
- Temperature effect: 0.01 % per °C
- Input span: 7.8Ω up to 290.3Ω (20°C...850°C Pt100)  
10°C range is also available with reduced accuracy

When ordering you must specify:

- Sensor: (Pt100)
- Cal: ? - ???°C

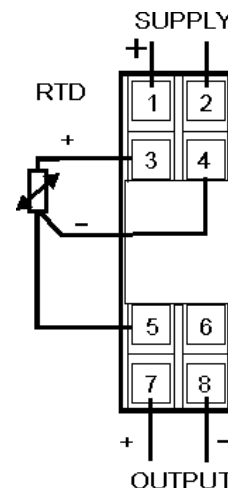

## Option 6: Frequency / Pulse Input

### Frequency Input


The SI236 can be configured for frequency input, accepting most pulse signals down to 0.2Vpp.

Calibration range: 0 - 10Hz up to 0 - 5kHz  
 Input type: Sine, Triangle, Pulse, Square 200mVpp min (70mV rms). 22Vpp max.

Input impedance: typically 3k $\Omega$ .  
 Linearity & repeatability: 0.2% of range  
 Temperature effect: 0.012% /  $^{\circ}\text{C}$   
 Offset: -50% of range (e.g. 1 - 2kHz input)

When ordering you must specify:

Cal: ???-???Hz  
 Level: 200mVpp min, 22Vpp max

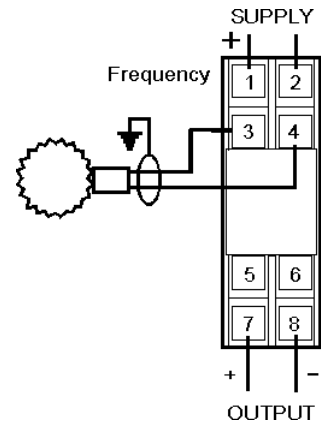


### DC Pulse Input

The SI236 can also accept a pulse input from proximity sensors or passive devices such as contact or open collector devices. An auxiliary supply of 8Vdc or 24Vdc is available at terminal 5,

Calibration range: 0 - 10Hz up to 0 - 5kHz  
 Input impedance: typically 3k $\Omega$   
 Linearity & repeatability: 0.2% of range  
 Temperature effect: 0.012% /  $^{\circ}\text{C}$   
 Offset: -50% of range (e.g. 1 - 2kHz input)

When ordering you must specify:

Device: (NAMUR, NPN Prox, PNP Prox, or Contact)  
 Aux Supply: between 8 and 20V (NAMUR 8V)  
 Frequency: ??? - ??? Hz

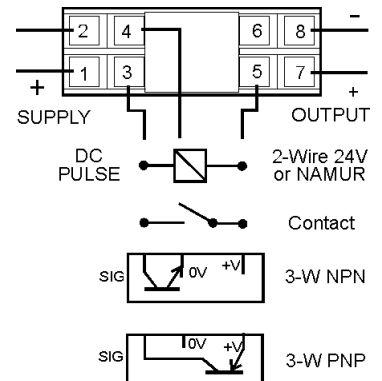


## Option 7: Resistance 2-Wire

The resistance or slide wire receives a constant load independent current from a current source being part of the SI236. This current source is configured for two basic ranges: 4mA or 40mA. Final adjustment is carried out by a 15-turn internal trim potentiometer to suit the resistance sensor.

Input span: 2 $\Omega$  up to 5k $\Omega$   
 Combined linearity and drift error: 0.5% of input range.

When ordering you must specify:

Cal: ??-?? ohms (input span 0-2ohm up to 0-5k ohm)

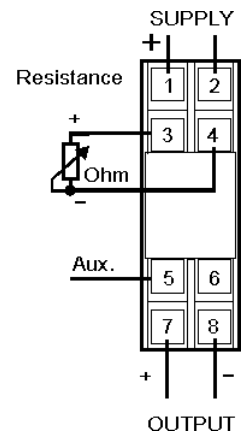

## Option 8: AC Current / Voltage

### AC Voltage

For AC-voltage input the SI236 can be equipped with a precision rectifier circuit.

Input range: 10mV up to 500Vac  
 Input impedance: 12k $\Omega$  for 10mV input, > 1M $\Omega$  for 500V input.  
 Combined linearity and drift error < 0.5% of range


When ordering you must specify:

Cal: ?-???Vac (input range 10mV up to 500Vac)  
 Frequency: 50Hz ?

### AC Current

For AC-current input to the SSP235, either an internal shunt or CT is fitted.

Input range: 0.5mA up to 10Aac (40-60Hz Sine)  
 Input impedance: 0.008 $\Omega$  at 5A  
 When ordering you must specify:  
 Cal: 0-???Aac (0.5mA up to 10Aac)  
 Frequency: 50Hz

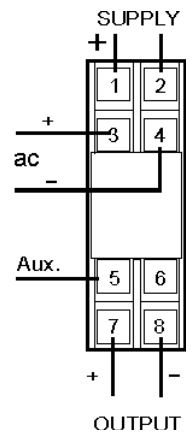

In the interest of development and improvement, APCS reserve the right to amend, without notice, details contained in this publication. APCS will accept no legal liability for any errors, omissions or amendments.