

The SL339 is a software configurable isolating converter providing true 3-way galvanic isolation up to 2500Vrms for standard process signals. The programming socket is under the front door flap. The SL303 USB isolator is used with the SL300 Windows software to display real time input output and calibration parameters.

Key features of the SL339;

- Small 12.4mm case size.
- Wide range AC/DC power supplies.
- 15 Input ranges and 11 output ranges.
- No isolation barrier errors.
- Faster input to output response.
- Input linearisation.
- User engineering units and scaling.
- Supply for power loop input devices.
- Reverse and direct acting output.
- Output signal limiting.
- Input filter for fast or slow response time.




### Ordering Detail

Order Code	Supply
SL339-10	80-300Vdc / 80-280Vac 50/60Hz
SL339-20	10V - 60Vdc / 16 - 42Vac 50/60Hz

### General Specifications

Size:	12.4W x 113H x 108D (mm).
Mounting:	Clip for 35mm DIN-Rail.
Housing material:	ABS / Polycarbonate blend
Connection:	Pluggable screw terminals.
Weight:	85g (including packaging).
Operating temperature:	-5...+65 °C.
Temperature drift:	0.01% per °C.
EMC:	AS/NZS 4251.1 (EN 50081.1)
Load change effect:	< 0.05% (current limited to 22mA)
Response time:	LED on = 400mS, LED off = 25mS.
Output ranges:	0-1mA, 0-10mA, 0-20mA, 4-20mA, 0-1V, 0-2V, 0-5V, 1-5V, 0-10V, 2-10V, 0-20V
Output drive:	10mA into 0 - 2kΩ, 20mA into 0 - 800Ω.
Input ranges:	0-1mA, 0-10mA, 0-20mA, 4-20mA, 0-50mA, 0-1V, 0-2V, 0-5V, 1-5V, 0-10V, 2-10V, 0-20V, 0-50V, 0-100V, 0-200V.
Input impedance:	1mA/1kΩ, 10mA/100Ω, 100mA/36Ω (Term 6). Voltage input / > 1MΩ (Term 7).
Loop power supply:	19V / 24mA
Overload continuous:	
Voltage input:	900V MAX.
Current input:	100mA MAX.
Noise immunity:	130dB CMRR.
Input/output isolation:	>2.5kVrms.
Protection class:	IP40.
Calibration accuracy:	<0.1%.
Linearity:	<0.1%.

### Connection and Controls

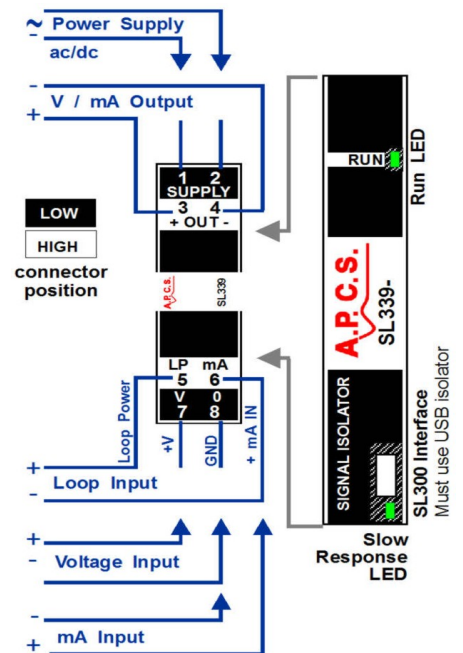

In the interest of development and improvement, APCS reserve the right to amend, without notice, details contained in this publication. APCS will accept no legal liability for any errors, omissions or amendments.